

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
14 July 2005 (14.07.2005)

PCT

(10) International Publication Number
WO 2005/063069 A3

(51) International Patent Classification⁷: A43B 7/06, 7/12, 13/12, B05D 7/24

(21) International Application Number: PCT/EP2004/014717

(22) International Filing Date: 27 December 2004 (27.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: PD2003A000312

30 December 2003 (30.12.2003) IT

(71) Applicant (for all designated States except US): GEOX S.P.A. [IT/IT]; Via Feltrina Centro, 16, 31044 Montebelluna (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): POLEGATO MORETTI, Mario [IT/IT]; Via Antonini, 7, I-31035 Crocetta Del Montello (IT). FERRARESE, Antonio [IT/IT]; Via Rimembranza, 23, I-37063 Isola Della Scala


(74) Agent: MODIANO, Guido; Modiano & Associati, Via Meravigli, 16, I-20123 Milano (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: BREATHABLE WATERPROOF SOLE FOR SHOES

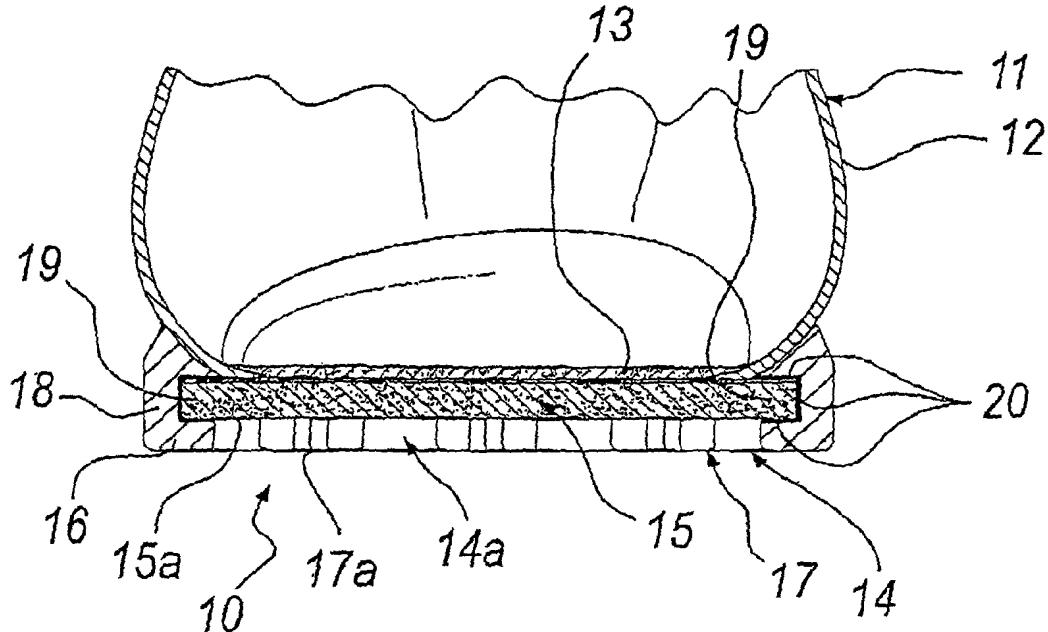

WO 2005/063069 A3

(57) Abstract: A waterproof breathable sole for shoes (10), which comprises, for at least part of its extension, at least two structural layers, a lower one (14) provided with a supporting structure so as to form the tread, and an upper one (15, 215) that is permeable to water vapor. The lower layer (14) has portions (14a, 114a) that are open onto the upper layer (15, 215). A coating (21, 221) obtained by means of a plasma deposition treatment for waterproofing is provided on the upper layer. In this manner, a layer is obtained that has structural functions and characteristics of resistance to damage and is at the same time waterproof and breathable.



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

(48) Date of publication of this corrected version:

26 January 2006

Published:

— *with international search report*

(15) Information about Correction:

see PCT Gazette No. 04/2006 of 26 January 2006, Section II

(88) Date of publication of the international search report:

9 September 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.